


Respina AirComp PA

Synthetic (PAO) air compressor oil

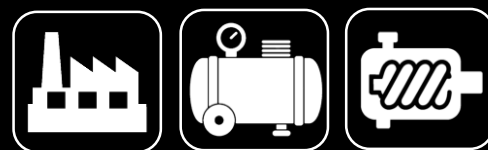

Description

Respina AirComp PA are high-performance synthetic compressor oils produced based on selected PAO base oils and suitable additives. They are useful for reciprocating (piston) air compressors and also rotary vane/screw compressors with very long operating life.

Specification and Approvals

- DIN 51506 VDL
- ISO 6743-3A DAH
- ISO 6743-3A DAJ

Advantages & Benefits

- Excellent oxidation stability
- Excellent rust & wear protection
- Excellent corrosion protection
- Extra high-temperature performance
- Reduced deposits formation
- Low foaming / good air release

Typical Data

Property	PA 32	PA 46	PA 68	PA 100	PA 150	Test method
Viscosity at 40°C	32	46	68	100	150	ASTM D445
Viscosity at 100°C	6	7.8	10.6	14	19.4	ASTM D445
Viscosity Index	140	140	140	140	140	ASTM D2270
Flash Point °C	+240	+250	+256	+270	+274	ASTM D92
Pour Point °C	-50	-48	-48	-42	-42	ASTM D97
Density kg/m ³	830	835	840	845	850	ASTM D4052

❖ The above data are typical and acceptable variation may occur during production. Also, some possible changes or modifications can be made upon customer request and specific needs.